

DATA SHEET. Model: PL1-4800E.

Self-contained emergency floodlight with non-maintained functioning of the PL Series.



Description

Emergency floodlight for surface mounting.

Watertight metallic housing with epoxy paint in grey colour RAL 7035: wall cabinet with lockable door.


Four LED spotlights with dispersed light beam and soft opal diffuser as standard (watertight housing), ideal for homogeneous from great height.

Technical characteristics

| | |
|------------------------|---|
| Lamp in emergency | 4 x 24 x LED White |
| Lamp in maintained | N/A |
| Flux in emergency | 4.800 lm |
| Flux in maintained | N/A |
| Colour temperature | 5,700 K |
| Charge indicator | 1 x LED green |
| Autonomy | 1 h |
| Supply voltage | 230 Vac - 50 Hz |
| Operation temperature | 0 ÷ 40°C |
| Mains power | 6,6 W |
| Battery | Ni-Cd (HT) 14.4 V - 4 Ah |
| Remote controllable | Yes (TL-300) |
| Protection rating | IP67 - IK08 |
| Electrical insulation | Class I |
| Applicable legislation | CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU |

Photometric curve

Cd/Klm

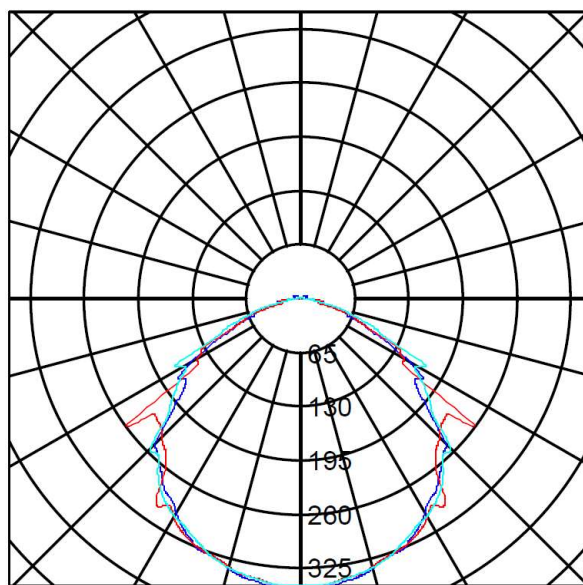

■ 0-180 ■ 45-225 ■ 90-270 ■ 135-315


DATA SHEET. Model: PL1-4800E _ Rev. 01 (March 2024)



LUZ NOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com



Dimensions

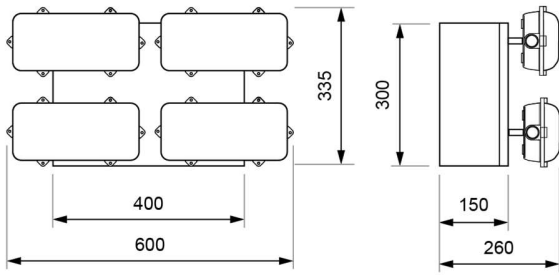

DATA SHEET. Model: PL1-4800E _ Rev. 01 (March 2024)



LUZ NOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com

