

DATA SHEET. Model: PL2-2400E.

Self-contained emergency floodlight with non-maintained functioning of the PL Series.



Description

Emergency floodlight for surface mounting.

Watertight metallic housing with epoxy paint in grey colour RAL 7035: wall cabinet with lockable door.


Two LED spotlights with dispersed light beam and soft opal diffuser as standard (watertight housing), ideal for homogeneous from great height.

Technical characteristics

Lamp in emergency	2 x 24 x LED White
Lamp in maintained	N/A
Flux in emergency	2.400 lm
Flux in maintained	N/A
Colour temperature	5,700 K
Charge indicator	1 x LED green
Autonomy	2 h
Supply voltage	230 Vac - 50 Hz
Operation temperature	0 ÷ 40°C
Mains power	6.6 W
Battery	Ni-Cd (HT) 14.4 V - 4 Ah
Remote controllable	Yes (TL-300)
Protection rating	IP67 - IK08
Electrical insulation	Class I
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

Photometric curve

Cd/Klm

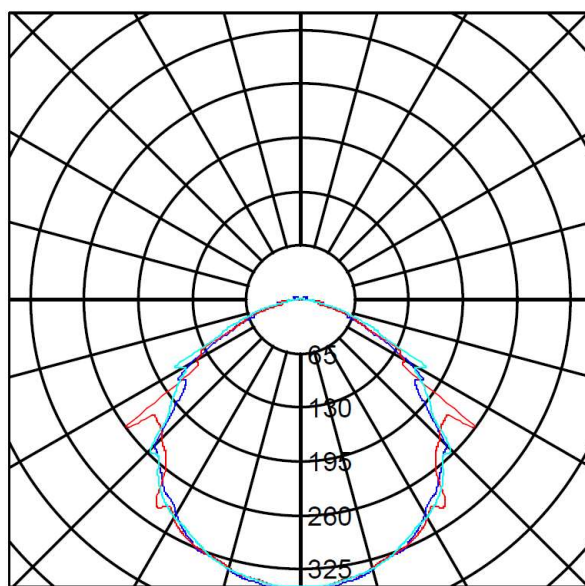

■ 0-180 ■ 45-225 ■ 90-270 ■ 135-315


DATA SHEET. Model: PL2-2400E _ Rev. 01 (March 2024)



LUZ NOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com



Dimensions

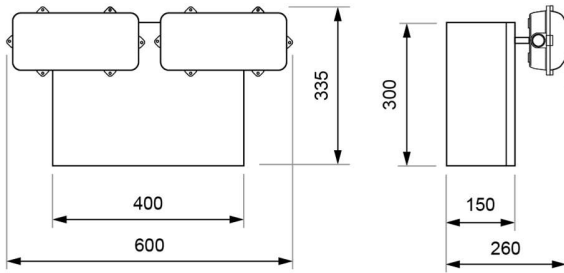

DATA SHEET. Model: PL2-2400E _ Rev. 01 (March 2024)



LUZ NOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com

