



# FI Led Series

LED emergency luminaire for low temperatures. This is a emergency luminaire of the LLE series adapted to work in a temperature range of -40 °C to 40 °C. The electronics regulate the temperature of the battery in any changing environment: cold chambers, contrast between night and day, etc. Remote controllable.




### Non-maintained

model	Φ (lm)	A (h)	P net (W)	RRP (€)
FIL-250	250	1	23.0	131.09
FIL-450	450	1	23.0	147.48

### Maintained

model	Φ (lm)	A (h)	P net (W)	RRP (€)
FIL-250B	250	1	26.0	147.48
FIL-450B	450	1	28.0	163.86

### Surface mounting

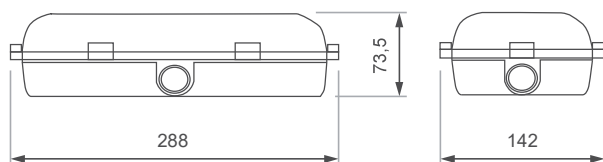

- ◇ Protection rating: IP67.
- ◇ Ni-Cd (HT) battery.
- ◇ Supplied with three cable gland entries for cable glands size PG-13.5 and two plugs with sealing gaskets.
- ◇ Colour temperature: 5,700 K (cold light).

### Recessed mounting

Stainless steel frame

Cut: 300 x 160 mm



Ref. MBEL-I  
386 x 196 mm  
RRP. 26.05 €

### Adjustable mounting

Epoxy-painted steel orientation set in grey RAL 7035



Ref. COBEL  
RRP. 19.36 €