

DATA SHEET. Model: PH1-2000.

Self-contained emergency floodlight with non-maintained functioning of the PH Series.



Description

Emergency floodlight for surface mounting.

Small hinged metal body with epoxy paint in RAL 7035 grey: the cover is supported at 90° to the fixed base on the wall, allowing easy access to the interior.


Four fully adjustable LED spotlights with a concentrated light beam, suitable for great heights.

Supplied with a PG-11 cable gland for cable entry from the side.

Technical characteristics

Lamp in emergency	4 x LED White 5,000 K
Lamp in maintained	N/A
Flux in emergency	2.000 lm
Flux in maintained	N/A
Charge indicator	1 x LED green
Autonomy	1 h
Supply voltage	230 Vac - 50 Hz
Operation temperature	0 ÷ 40°C
Mains power	3,6 W
Battery	Ni-Cd (HT) 7.2 V - 3 Ah
Remote controllable	Yes (TL-300)
Protection rating	IP42 - IK04
Electrical insulation	Class I
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

Photometric curve

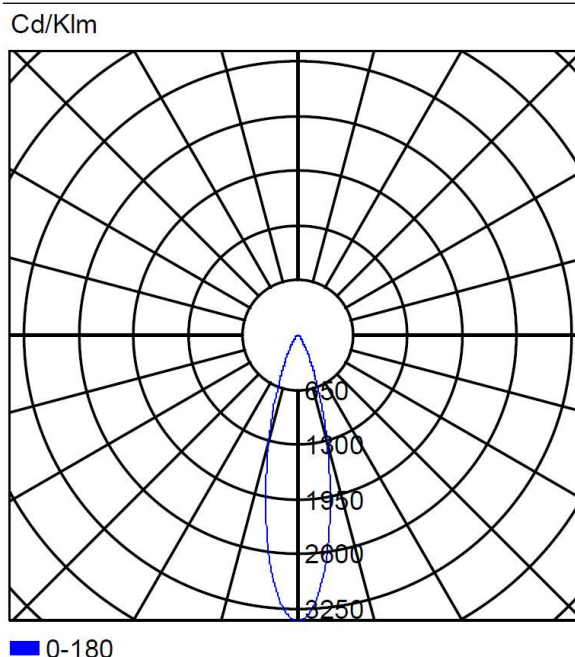

DATA SHEET. Model: PH1-2000 _ Rev. 01 (March 2024)




LUZNOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com



Dimensions

Surface mounting

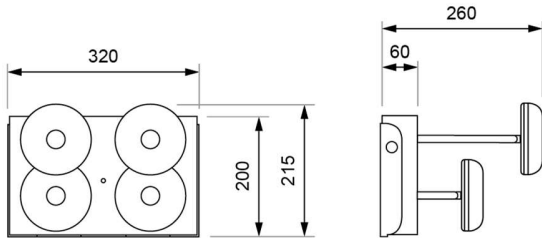

DATA SHEET. Model: PH1-2000 _ Rev. 01 (March 2024)



LUZ NOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com

