
DATA SHEET. Model: PLN-1000BN.

Self-contained emergency floodlight with non-maintained functioning and seismic qualification of the PLN Series.



Descripción

Emergency floodlight for surface mounting in critical structures or areas with seismic risk.
Hinged metal body of stainless steel with front spotlights.
Two fully adjustable LED spotlights, with concentrated light beam, ideal for great heights.

Technical characteristics

Lamp in emergency	2 x LED White 5.000 K
Lamp in maintained	N/A
Flux in emergency	1.000 lm
Flux in maintained	N/A
Charge indicator	1 x LED green
Autonomy	24 h
Supply voltage	230 Vac - 50 Hz
Mains power	Charge 24 W Maintenance 5 W
Battery	Ni-MH (HT) 12 V - 20 Ah
Remote controllable	Yes (TL-300)
Protection rating	IP55 - IK08
Electrical insulation	Class I
Weight	13 kg
Battery recharge time	24 h

Technical characteristics

Usage temperature	From -10°C to 40 °C
Relative humidity	< 90% no condensation
Anchoring	4 lugs stainless steel 4 screws M6 quality 8.8
Applicable legislation	CE marking (93/68/CEE): 2014/35/EU 2014/30/EU 2011/65/EU

Seismic qualification

According to IEEE-344	
Horizontal plane	$a > 20 \text{ g} (4 \text{ Hz} < f < 100 \text{ Hz})$
Vertical plane	$a > 10 \text{ g} (4 \text{ Hz} < f < 100 \text{ Hz})$


DATA SHEET. Model: PLN-1000BN _ Rev. 00 (enero 2021)



LUZNOR Desarrollos Electrónicos, S.L.
Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
NIF: B01266451 · luznor@luznor.com · www.luznor.com




Dimensions

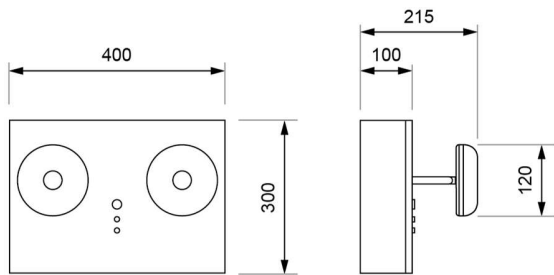



Photometric curve

Cd/Klm

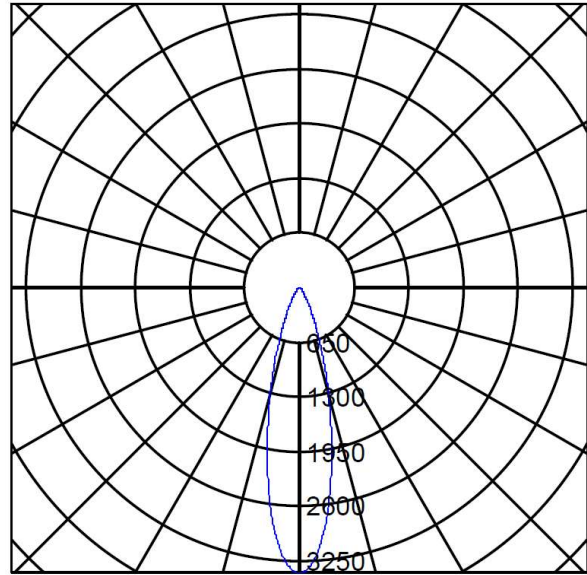

■ 0-180

Recorded response spectra

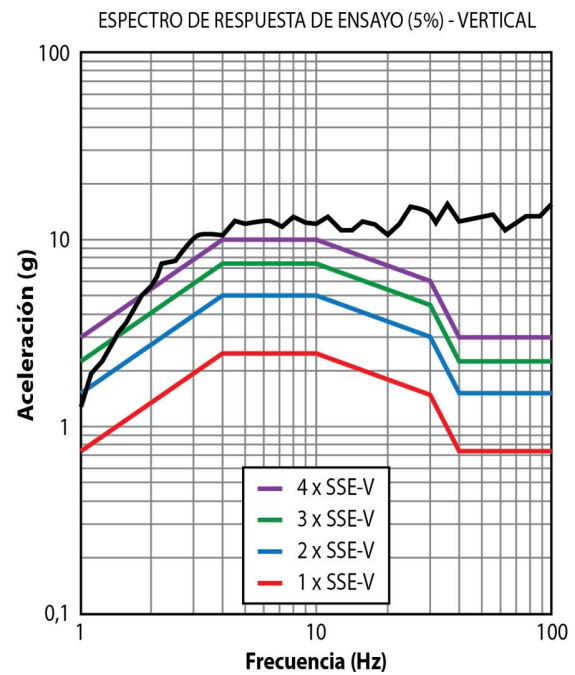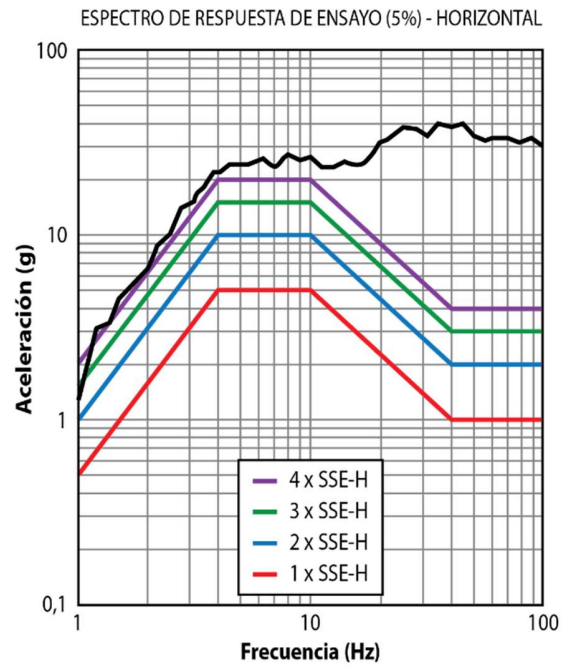

DATA SHEET. Model: PLN-1000BN _ Rev. 00 (enero 2021)



LUZ NOR Desarrollos Electrónicos, S.L.
 Paduleta, 47 · 01015 · Vitoria-Gasteiz · 945 200 961
 NIF: B01266451 · luznor@luznor.com · www.luznor.com

